




SECTION 9



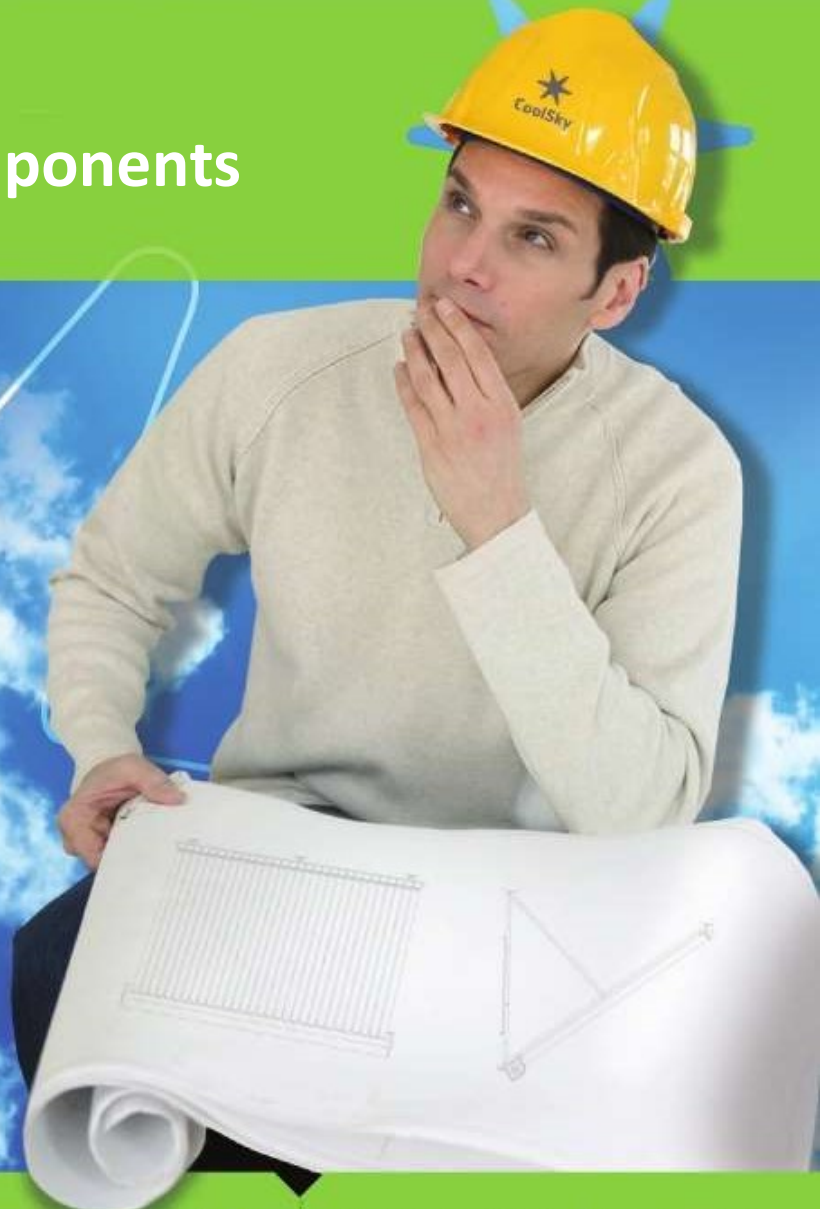


Speciality Roofing Components








CoolSky Ltd

42 Milecross Road, Newtownards BT23 4SR
Tel: +44 (0)28 9182 9470
Email: info@cool-sky.co.uk

Company Registration No. NI072166
VAT No. GB 108838970
Copyright © 2012 CoolSky

Order Code	Description of Package and Contents	Pictures
	<p><u>Roof Flashing Materials :</u> Perform® is a composite flashing consisting of aluminium mesh, embedded in a special type of polymer rubber that offers the same functionality of lead. The materials are environmentally sound, UV resistant, non-toxic, lighter than lead with excellent stretching properties and provides a ‘breathable’ covering which prevents the formation of condensation.</p> <p><u>4 Colours Available (Grey, Black, Brown or Terracotta) :</u> 150mm x 4m Roll 250mm x 4m Roll 300mm x 4m Roll 450mm x 4m Roll 600mm x 4m Roll 1250mm x 4m Roll</p> <p>Note : Brown & Terracotta is made to order and is not ex-stock</p>	 
	<p><u>Self-Adhesive Roof Flashing Materials :</u> Fast Flash is ideal for any application requiring a quick and secure flashing solution. It can be installed on roofs with a slope of min 5° and on almost all roof materials, is environmentally friendly and easy to install with a self-adhesive reverse, is flexible and workable.</p> <p><u>3 Colours Available (Grey, Black or Brick Red) :</u> 280mm x 5m Roll 370mm x 5m Roll 560mm x 5m Roll</p> <p>Note : Brick Red is made to order and is not ex-stock</p>	  

Order Code	Description of Package and Contents	Pictures
	<p><u>Multi-cable Solar PV Flashing :</u> The speciality flashing for up to 10 solar PV cables on tile or slate roofs.</p> <p>Suitable for cables with o.d. 4 to 8mm and avoids risk of damage or pressure on cables by isolating from tiles or slates and provides a complete weatherproof seal.</p> <p>Black EPDM cone with either 490 x 410mm Nu-Lead® acrylic coated lead base or 450 x 600mm Aluminium base. Suitable for any pitch of roof.</p> <p>Purpose made durable solution as required under MCS Installation Requirements.</p> <p>Nu-Lead Version (Single Item) Aluminium Version (Single Item)</p>	 
	<p><u>Solar Thermal Flashing :</u> The speciality Flashing for Solar Thermal Installations this purpose designed flashing provides the safest, most efficient method of flashing solar thermal pipes and cables on tile and slate roofs.</p> <p>Grey silicone cone ideally suited to solar thermal pipe sizes (from 0 to 35mm) that resists temperatures to constant 200°C with Nu-Lead® base which will not stain or corrode the roof, together with long-life.</p> <p>Available with cone for single or dual pipe entry.</p> <p>Purpose made durable solution as required under MCS Installation Requirements.</p> <p>Single Pipe Silicone Cone (2 Items per Pack) Dual Pipe Silicone Cone (Single Item)</p>	  



Please Note : All our prices are quoted ex-works and ex-VAT.

CoolSky Ltd

42 Milecross Road, Newtownards BT23 4SR
Tel: +44 (0)28 9182 9470
Email: info@cool-sky.co.uk

Company Registration No. NI072166
VAT No. GB 108838970
Copyright © 2012 CoolSky